



Samsung WB850F Screen Replacement

This guide will help to replace Samsung WB850F camera screen.

Written By: Jousling Vazquez



INTRODUCTION

This guide will give user step by step instructions on how to replace the screen of the camera.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Screen




- Use the J0 screwdriver to remove the six outside screws. Orientation is from the front of the camera.
- 2 screws are located on the bottom.
- 2 screws are located on the left side. (HDMI port)
- 2 screws are located on the right side of the camera. (Opposite HDMI side)

Step 2




- To remove the back screen case, use the blue opening tool to open the case up from the right side.

Step 3

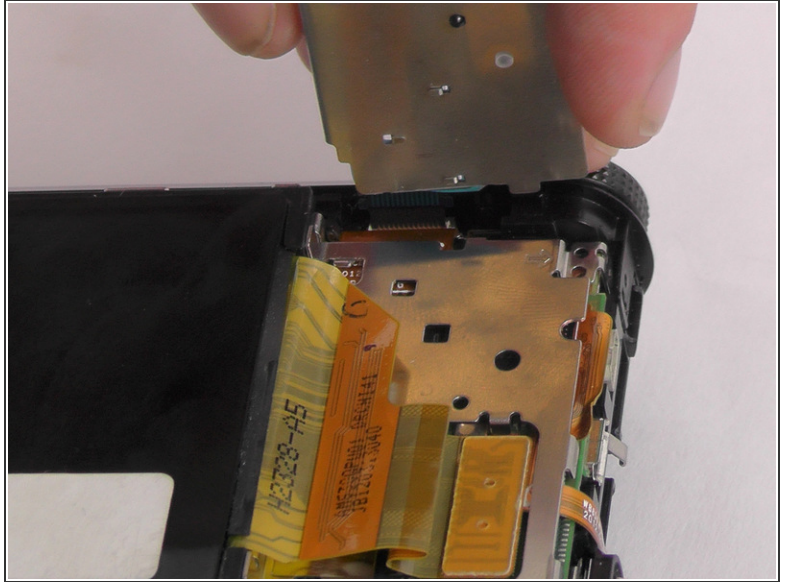


- Use screwdriver to remove control panel screw.
- Lift up control panel from the side where the screw was just removed.

Step 4

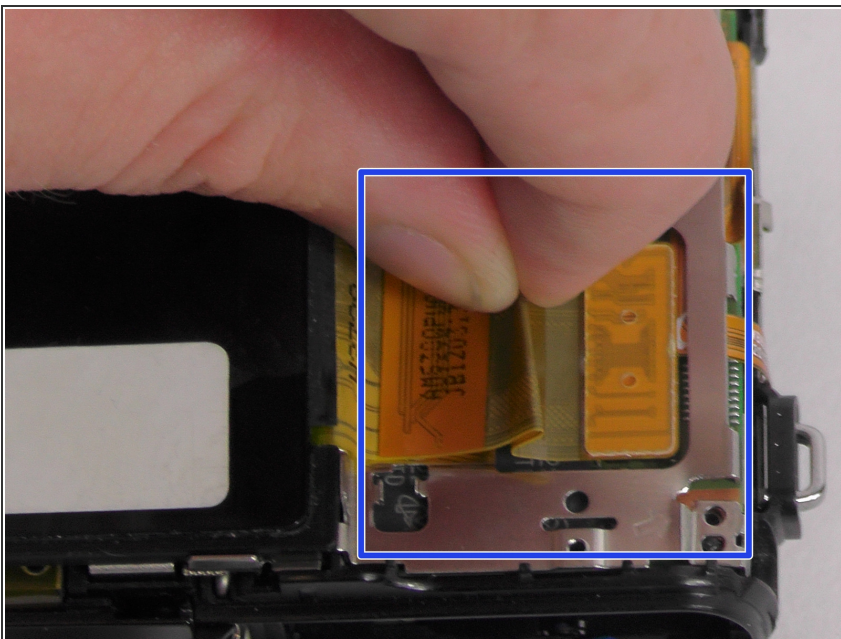

- Gently pull on the screen connector to remove the yellow connector ribbon.
- Remove screen from camera.

Step 5

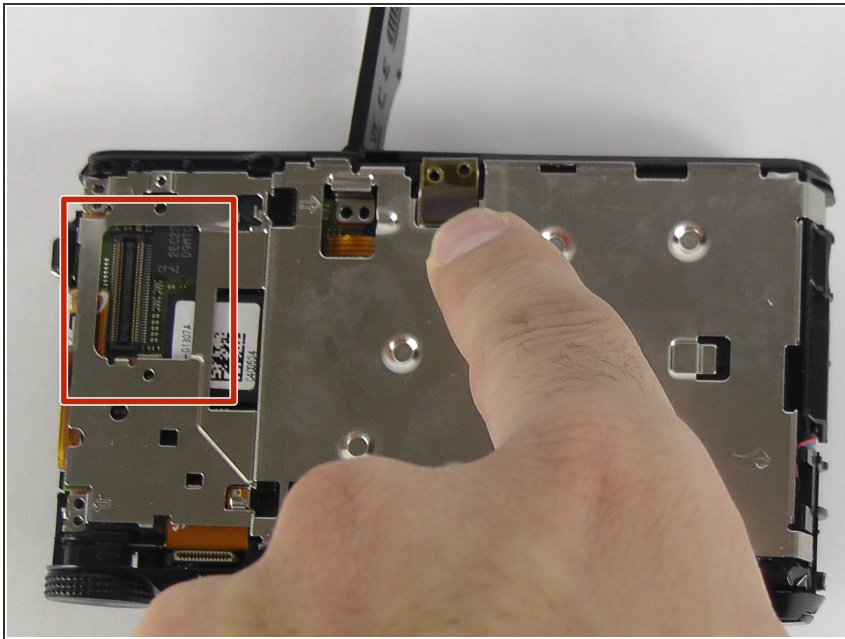

- Connect new screen on to motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 06:13:56 AM.